
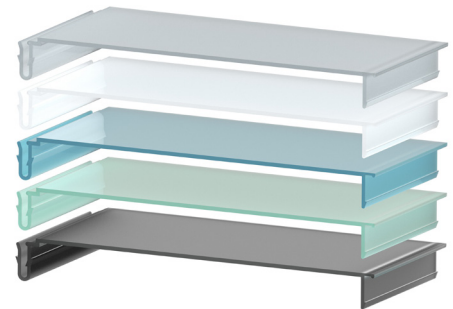


New benchmarks for polycarbonate facades.

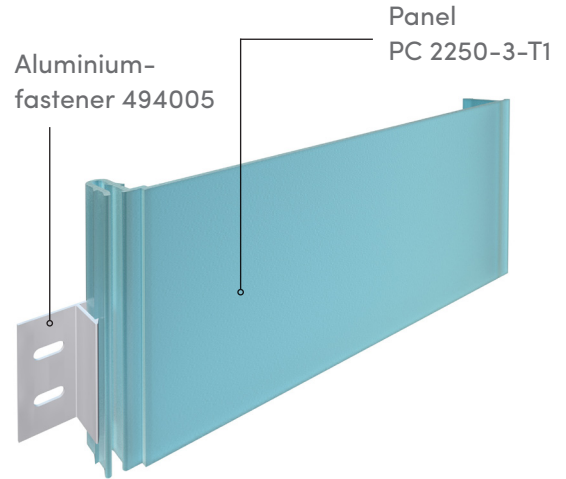

Product properties

Width	250 mm
Thickness	2.7 mm
Weight	approx. 3.8 kg/m ²
Flammability classification	B-s1, d0 according to EN 13501
UV-protection	UV-stabilized
Coefficient of linear expansion	0.065 mm/m/°C
Delivery length	up to 6 m

Standard-Versions (frosted finish) Light transmission*

(Colours similar to RAL available upon request)

Clear	approx. 77%
Opal	approx. 33%
Petrol	approx. 57%
Seaglass	approx. 75%
Titangrey	approx. 37%

* in-house measurement

SWP

Horizontal, diagonal or vertical, transparent or opaque, brilliant colours to discreet and muted grey colours, the Rodeca Solid Wall Panel offers a new perspective of design freedom for your project.

- numerous colours
- sustainable
- light transmissive
- lightweight
- weather proof
- simple clip-connection

Span widths



horizontal installation



vertical installation

Distance between supports

Wind load	Distance
up to 2.4 kN/m ²	80 cm
up to 3.0 kN/m ²	60 cm

The following distance between supports show the breaking loads of the SWP panel depending on different spans. The values do not replace national building regulations and only apply in conjunction with RODECA accessories and in compliance with the RODECA assembly guidelines. Appropriate safety factors must be taken into account in accordance with national requirements.

